

### EXTERNAL, HIGHLY BRATHABLE REFLECTIVE MEMBRANE



#### Technical Advantages

- ✓ Highly breathable membrane with low SD value
- ✓ Significant improvement on thermal performance
- ✓ Cost savings
- ✓ Humidity controlling and insulation properties
- ✓ Windtight and waterproof
- ✓ Can be easily recycled due to the PP material — very versatile
- ✓ Can be installed both on roof and wall, protecting the structure of the building envelope on long-term

#### Technical Data

Description	Standard	Performance
Weight	ISO 563	140 ±5% g/m <sup>2</sup>
Colour		Anthracite
SD-Value	EN 12572	0.08 M
Reaction to Fire	EN 13501-1	E
Nail tear resistance MD / CD*	EN 12310-1 mod with EN13859-2:2014	130 / 160 N
Resistance to water penetration	EN 13111	W2
Tensile strength MD/CD*	EN 12311-1	250 / 220 N/50 mm
Emission Value	EN 15976	< 0.05
Temperature resistance		-20°C to 80°C
CE labelling	EN 13859-1	Available
UV Resistance		3 months
R-Value of the air cavity	EN ISO 6946	0.69 m <sup>2</sup> K/W **

\*MD = longitudinal CD = transversal

"The information provided is based on current knowledge and experience. This data sheet may become invalid and we reserve the right to make changes to designs and processes as we continually improve quality. Processing instructions including full system component details should be adhered to. Visit [partel.com](http://partel.com) for the most up to date information"



[www.partel.ie](http://www.partel.ie)  
[sales@partel.ie](mailto:sales@partel.ie)  
P: 0818 33 33 55



[www.partel.co.uk](http://www.partel.co.uk)  
[sales@partel.co.uk](mailto:sales@partel.co.uk)  
P: 02037 401918



[www.partel.com](http://www.partel.com)  
[sales@partel.com](mailto:sales@partel.com)  
P: 888 487 1012

### General Conditions

Partel **ECHOFOIL** membranes should be laid with the printed side facing the installer.


Membranes are suitable as roofing/decking underlays. They are resistant to driving rain and wind. Apply onto the existing support structure, parallel to eaves with overlaps of 100mm (4") in a taught manner. It should be nailed or screwed under the overlapped section. Tape all joints using **CONEXO MULTISEAL**, **ECHOSEAL** or **VARA SEAL**. Use **NAIL SEAL** underneath all battens.

Penetrations should be sealed using **KABSEAL** or **CONLEY BUTYL** and edge connections can be sealed with **ACRABOND**, **ACRALINE** or Partel tapes. Cross battens are recommended for ventilation and additional security. Wall membranes are suitable only for wall installation. Roof membranes can be used on walls and roof.

Partel membranes can be used as temporary roof cover for 3 months, roof pitch must be 15' or greater. During installation membranes should be immediately secured or fixed down to avoid wind damage.

Connection joints should be free from tensile strain. Acrylic base adhesive tapes are pressure activated, sufficient pressure is required to ensure a long lasting bond. A smoother physical substrate will result in optimum adhesion between tape and surface. It is the responsibility of the applicator to check the substrate for suitability, adhesion tests are recommended in non standard situations. Use **ACRAPRIME** to prime all rough, porous or dusty surfaces.

Damage should be repaired thoroughly by removing damaged material and installing a new piece of applicable membrane pushed under the existing membrane and then passing over the existing membrane (see image) with 150mm (6") overlap to sides of hole and 100mm (4") at top/bottom. The membrane should be sealed using **CONEXO MULTISEAL**, **ECHOSEAL** or **VARA SEAL** to connect the overlap.

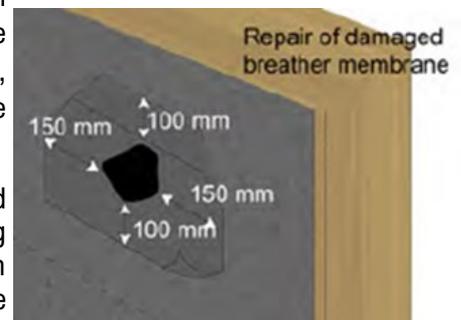

*"The information provided is based on current knowledge and experience. This data sheet may become invalid and we reserve the right to make changes to designs and processes as we continually improve quality. Processing instructions including full system component details should be adhered to. Visit [partel.com](http://partel.com) for the most up to date information"*



[www.partel.ie](http://www.partel.ie)  
[sales@partel.ie](mailto:sales@partel.ie)  
P: 0818 33 33 55



[www.partel.co.uk](http://www.partel.co.uk)  
[sales@partel.co.uk](mailto:sales@partel.co.uk)  
P: 02037 401918



[www.partel.com](http://www.partel.com)  
[sales@partel.com](mailto:sales@partel.com)  
P: 888 487 1012