


SEALING GROMMITS

Internal & External use

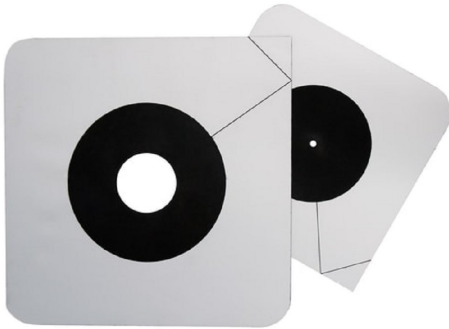

Technical data

Properties	Performance	Standard
Carrier	Modified butyl with acrylic adhesive	
Release film	Silicone coated pe	
Temperature range	-40°C to 150°C	-40°F to 302°F
Application temperature	-10° C	14° F
UV tested	6 Months	

Application areas

Partel KABFLEX is used to create permanent air and water tight seals at penetrations of varying size. KABFLEX can be used internally or external because of its unique properties.

Adheres to all Partel interior and exterior membranes, concrete, plaster, wood, steel, other vapour control layers including PE, PA, PP and aluminium, wood base panels OSB, MDF, plywood.

Application process

Ensure surface is clear from dust, grease, and loose material. The substrate must to be dry and free from frost. Prime surface with Partel ACRAPRIME and allow sufficient time for primer to dry depending on conditions. This will eliminate dust particles and result with a better bond.

Pull the product to be sealed through the preformed hole in KABSEAL. Peel the release liner from KABSEAL and with sufficient downward pressure press tape onto substrate, use Partel HELPING HAND to apply pressure evenly.

Advantages

Adhesion to all Partel interior and exterior membranes, concrete, plaster, wood, steel, other vapour control layers including PE, PA, PP and aluminium, wood base panels OSB, MDF, plywood.

A smoother physical substrate will result in optimum adhesion between tape and surface.

- Elastic—can be moulded to surfaces
- Excellent ageing resistance
- Water repelling carrier
- Adheres to timber, masonry, concrete, PVC, metal, Partel membranes
- Design life = lifetime
- Lowest VOC rating in hazardous substance test

General information

Connections joints should be free from tensile strain. Acrylic base adhesive tapes are pressure activated, sufficient pressure is required to ensure a long lasting bond. A smoother physical substrate will result in optimum adhesion between tape and surface. It is the responsibility of the applicator to check the substrate for suitability, adhesion tests are recommended in non standard situations.

Ordering information

Name	Dimension	Dimension	Units / pack
EXOSEAL KABSEAL 6-10	150mm x 150m	5" x 16-5"	5
EXOSEAL KABSEAL 15-30	150mm x 150m	5" x 16-5"	5
EXOSEAL KABSEAL 30-50	180mm x 180m	5" x 16-5"	2
EXOSEAL KABSEAL 50-90	180mm x 180m	5" x 16-5"	2
EXOSEAL KABSEAL 90-115	200mm x 200m	5" x 16-5"	2
EXOSEAL KABSEAL 115-170	290mm x 290m	5" x 16-5"	2
EXOSEAL KABSEAL 170-220	330mm x 330m	5" x 16-5"	2

"The information provided is based on current knowledge and experience. This data sheet may become invalid and we reserve the right to make changes to designs and processes as we continually improve quality. Processing instructions including full system component details should be adhered to. Visit partel.com for the most up to date information"